

(12) APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) **World Intellectual Property Organization**
International Office



(43) **International publication date**
27 October 2005 (27.10.2005)

PCT

(10) **International Publication No.**
WO 2005/100108 A1

(51) **International Patent Classification⁷:** B60S 1/52

(21) **International Application No.:**
PCT/DE2005/000328

(22) **International filing date:**
26 February 2005 (26.02.2005)

(25) **Language of submission:** German

(26) **Language of publication:** German

(30) **Priority data:**
10 2004 018 607.3 16 April 2004 (16.04.2004) DE

(71) **Applicant** (for all designated countries except the US):
REHAU AG + CO. [DE/DE]; Otto-Hahn-Strasse 2,
95111 Rehau (DE). **A. RAYMOND & CIE** [FR/FR];
113, cours Berriat, F-38028 Grenoble (FR).

(72) **Inventor; and**


(75) **Inventor/applicant** (US only): **BEYER, Matthias**
[DE/DE]; Berggasse 37/3, 71034 Böblingen (DE).
STICKEL, Horst [DE/DE]; Galileistr. 13, 71032
Böblingen (DE). **SPORER, Jürgen** [DE/DE];
Grünhaider Str. 70, 91573 Schönewald (DE). **UTZ,**
Daniel [DE/DE]; Vogesenstr. 15, 74915 Bad Bellingen
(DE). **ZIELKE, Peter** [DE/DE]; Markt 30, 08626
Adorf/V. (DE).

(74) **Attorney: PFUSCH, Volker;** Patentanwalts-
Partnerschaft, Rotermund + Pfusch + Bernhard,
Waiblinger Strasse 11, 70372 Stuttgart (DE).

(81) **Designated countries** (unless otherwise stated, for each
available type of national protective right): AE, AG, AL,
AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DK, DM,

[Continued on next page]

(54) **Title:** ADJUSTABLY MOUNTED SPRAY NOZZLE FOR WINDSHIELD WASHER FLUID OF A MOTOR VEHICLE

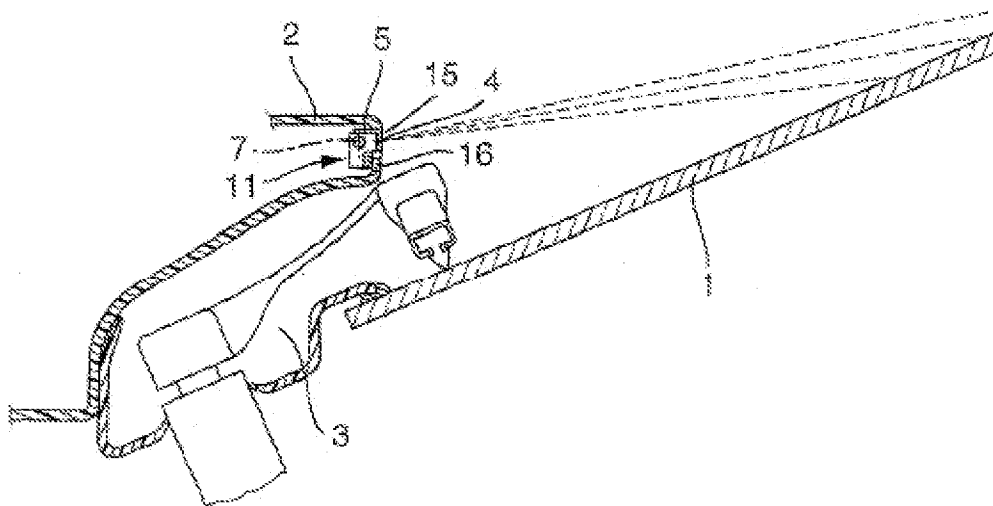

(57) **Abstract:** An adjustably mounted spray nozzle (4) for windshield washer fluid of a motor vehicle is designed to be easy to install and adjust. To this end, the spray nozzle (4) has the following features: it has a bearing axis (7) by means of which it can be attached to a vehicle in a manner that enables it to pivot about a y-axis of said vehicle; the spray nozzle (4) is provided with an adjusting-means element for pivoting about its bearing axis (7); the adjusting-means element is designed to cooperate with an adjusting-drive manipulator.

[Continued on next page]



DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

- (84) **Designated countries** (unless otherwise stated, for each available type of regional protective right): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE,

For the two-letter codes and other abbreviations, see the notes ("Guidance Notes on Codes and Abbreviations") provided at the beginning of each regular edition of the PCT Gazette.